


## NETQX 4 DOORS ACCESS CONTROL

- Up to 32000 card holders ( upgrade up to 100000)
- Buffer Events up to 5000 (upgrade up to 48000)
- 8 Analog inputs
- 10 Relay 10A N.C-N.O
- On board expender for 4 Doors 4 Relay
- Fire & Tamper built in input
- 3 colors Led indication
- Relay led indicator
- RS485 Built in
- All Wigand Formats
- Anti Pass Back
- Interlock
- Parking
- LPR Support
- Biometric Support ( bio/face/..)
- 2 Access Level Per user

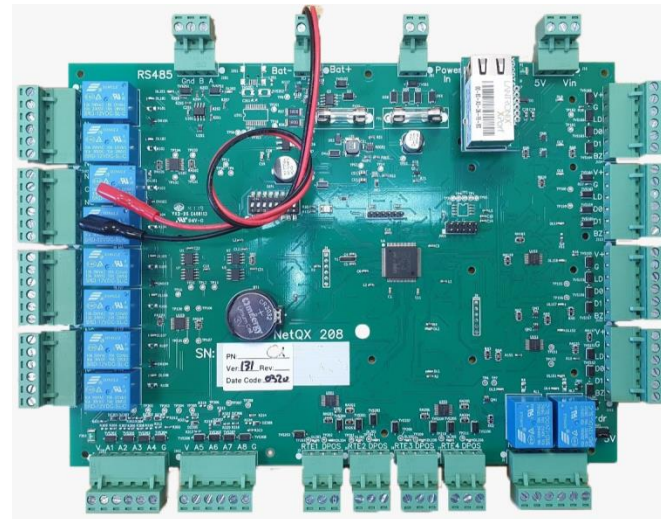

## Technical Specifications

Card Holder Records	32000 on-board (with up to 100,000 card holders )
Events buffer	5000 (with option up to 48,000)
Maximum Analog Inputs	8- protected inputs
Outputs (4)	Dry contact - 10 - 10A NO/NC
Time Zones	255 in system
Access Levels	255 in system
Communication Interfaces	RS-485 – ETH-USB-RS232
Antipass-Back	Hard and soft
Holidays	365 days, 8 holiday groups
Parking System	Functionality built-in
Access Levels	2 per card holder
Maximum Reader Support	Up to 4
Power Outputs	Protected power source (12V or 5V) for readers and door strikes

## Physical Characteristics

Power Input	12 VDC - 15 VDC
Standby Current	50 mA
Output Voltage	5 VDC or 12 VDC, jumper selectable
Operating Temperature	-45°C to +60°C
Storage Temperature	-65°C to +80°C

